

BROADSTEL

SEALED INTERNAL RECESSED

Tel: 0121 521 4500 Fax: 0121 521 4551 Email: sales@steelwaybrickhouse.co.uk www.steelway.co.uk

Steelway Broadstel range of access covers and frames are designed for use on a variety of internal applications that require a range of infill materials to meet the aesthetic surroundings of architecturally designed floor schemes. The Broadstel range is designed to be infilled with a grade C25 concrete to obtain the desired loadings which is left 15mm below the cover edge to accept the finished floor material. The Broadstel range will accept most floor finishes except vinyl. All Broadstel ranges are suitable for slow moving vehicular traffic and are EPDM sealed to prevent the escape of foul smells under normal atmospheric conditions.

Standard Features

- 1.6mm mild steel for unobtrusive appearance within floor schemes
- EPDM sealed with an additional channel for grease to create a double seal
- Triangular corner lifting bosses to aid in cutting the floor finish
- 4no corner locking screws
- Tapered cover sides to prevent jamming in the frame
- Keying in rods for concrete infill
- Suitable for floor finishes up to 15mm thick
- Slide out design to aid removal
- Profiled frame for ease of installation and stability
- Load tested to FACTA classifications B when filled with C25 concrete
- Galvanized to BSEN ISO1461

Additional Features

- /BE Decorative brass edge trim
- /SE Decorative stainless steel edge trim
- /PI Lift out peep in cover
- /SS Manufacture in 316 stainless steel
- /2RS Two rubber seals
- /TL Threaded Lifting

Size Range

Available in any size from 300 x 300mm clear opening to suit any chamber opening dimensions


Lifting Keys

Fig 9758A/L Single Lifting key

Fig RMXSS/Key Locking key


Fig R8473258 Threaded Lifting eye bolt

Please note that due to the nature of the product, mechanical lifting maybe required.

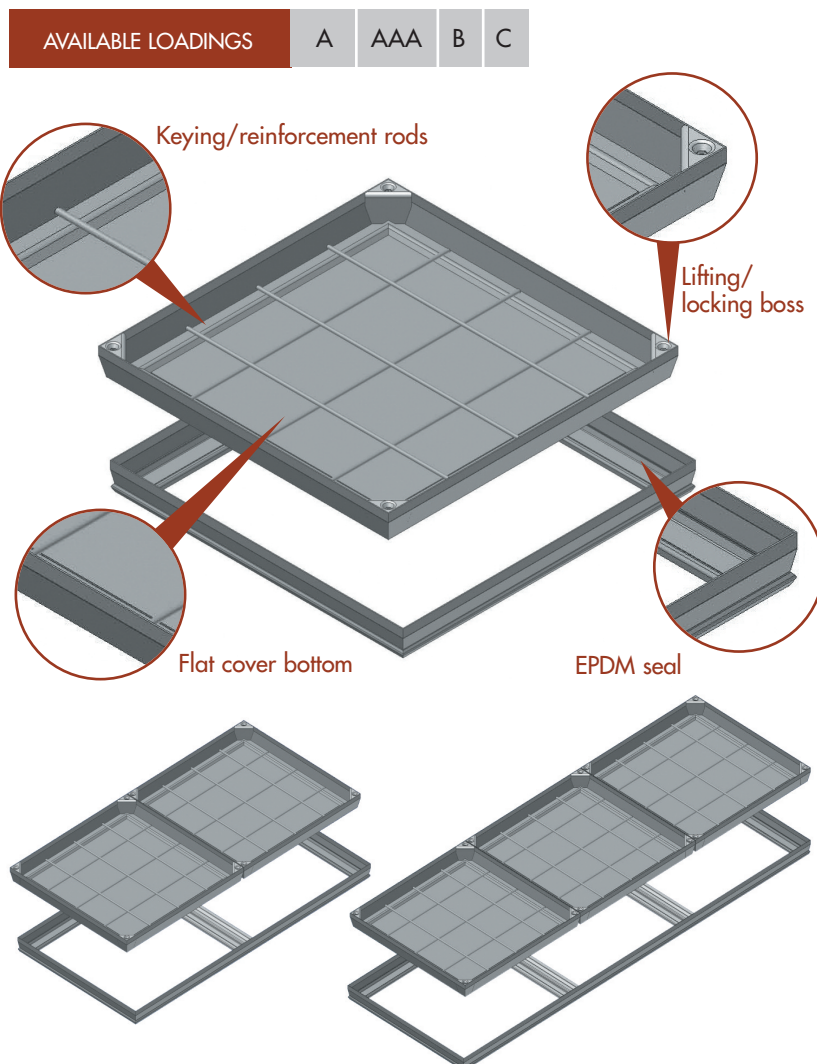

PRODUCT REFERENCES

| | | |
|----------|--------------|---------------|
| Fig 7369 | Single Units | Up to FACTA B |
| Fig 7379 | Single Units | FACTA C |
| Fig 2369 | Twin Units | FACTA AAA |
| Fig 2379 | Twin Units | FACTA B |
| Fig 3369 | Triple Units | FACTA AAA |
| Fig 3379 | Triple Units | FACTA B |



Example Specification

Fig 7369/600600/BE = Single cover FACTA B / 600 x 600mm clear opening / decorative brass edge trim